



Large Capacity Stackable Incubator Shaker

Product Introduction

BJPX-SDW-L Stackable Incubator Shaker


Engineered for space-constrained labs, this high-performance system features multi-unit stacking, multifunctional configurations, adjustable orbital motion, and multi-zone temperature control. Uniquely integrates dynamic and static cultivation in one compact unit - delivering exceptional capacity and flexibility for modern research demands.

Applications: Cell culture • Extraction • Sample mixing • Staining/destaining • Hybridization • Solubility testing • Plasmid purification • Bacterial suspension prep • Elution


Fixture Display



96-Well Plate

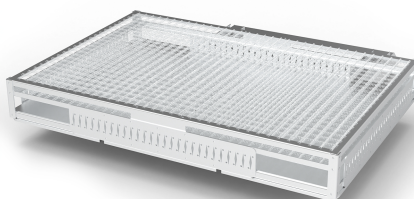

Universal Utility Clamp

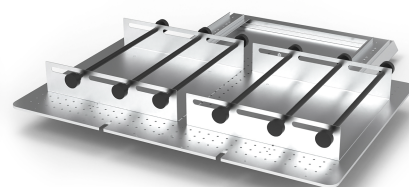

Clamp-Type Platform

Application Scenarios



Extraction















Pharmaceutical



Healthcare

Product Features

-  PID Microprocessor Precision Thermal Control
-  Electrically-Heated Tempered Glass Viewport
-  LCD Display, Intuitive parameter setup
-  UV Sterilization System
Maintaining chamber sterility
-  LED Auto-Illumination
Activates upon door opening
-  Triple-Unit Stackable
Top/bottom flip-door design
-  Premium BLDC Motor
Minimized vibration & noise
-  Adjustable Speed: 30-300 rpm
-  Imported Compressor
R290 Air-Cooled Refrigerant (CFC-Free)
-  Temperature
Range:RT+5° C-60° C/4° C-60° C
-  Programmable Curves
Repeat/Step/8-Segment modes
-  Multi-Alarm System
Overheat • Abnormal Shutdown •
Motor Fault • Door Overtime

Fixture Selection

Models	Clasp Model							
BJPX-SDW10-L BJPX-SDW20-L	Maximum capacity of triangular flask					Test Tube Rack	96-Well Plate	Clamp-Type Platform
	250ml	500ml	1000ml	2000ml	3000ml			
	34	24	15	8	6	4	21	2